



Premium Travertine, Marble, Sandstone, & Porcelain

Pavers • Coping • Slabs • Caps • Treads • Veneer



3273 E. Sharon Rd, Sharonville, OH 45241 | 513-469-0335

www.TruStoneDistributors.com

TruStone Premium Travertine Pavers

Your source for quality natural TruStone Travertine pavers and products.



Travertine

With a real TruStone Travertine application, you have an unmatched natural beauty, no two pieces being the same. When used in a patio, walkway, or pool, the blend of natural colors and textures is breathtaking. With TruStone Travertine you will now have a piece of art at a reasonable cost that will last for generations.

- **Precision cut and tumbled** - Enhance appearance and ease of installation
- **Non Slip Exterior** - High friction coefficient
- **Surface Stays Cool** - Compared to concrete and stone installations
- **Extremely Low Moisture Absorption Rate** - Eliminates concerns of freeze/thaw cycle stressing the materials



Colors & Sizes

Our pavers are 1.25" thick and come in a variety of sizes including:

8" x 8", 8" x 16", 16" x 16", 16" x 24", 24" x 24"

Patterns

We also stock large French (Versailles) patterns, which include: **8" x 8", 8" x 16", 16" x 16" and 16" x 24"**.

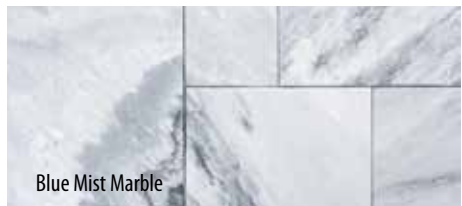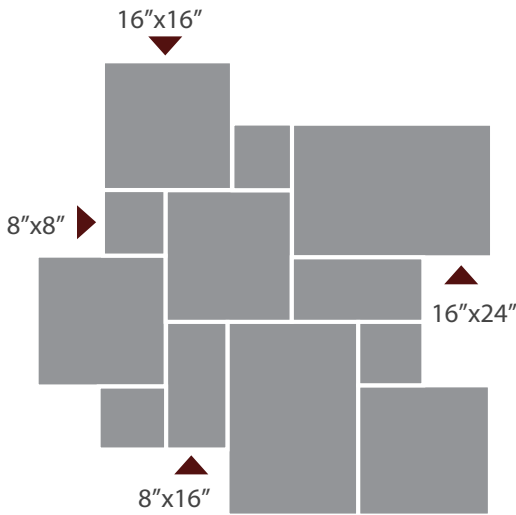

3273 E.Sharon Rd, Sharonville, OH 45241 | 513-469-0335

www.TruStoneDistributors.com

Please Note: Stone products are of a natural origin and will have variations in color & marking. Sample pictures furnished represent only the general coloration & structure of a particular type of stone.

TruStone Premium: Coping, Slabs, Caps, Treads, Veneer

Your source for quality natural TruStone Travertine pavers and products.




Coping

Coping for pools, step treads, and bench seating

1.25" thick: 12" x 24"

2" thick: 12" x 24", 16" x 48", 24 x 72"

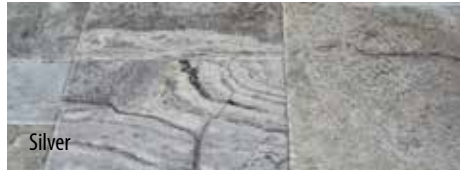

Mini Slabs

Great for Kitchen Counters and Bar Tops

24" X 24" X 2", 36" X 48" X 2", 24 X 72 X 2



Caps:



24" X 24" X 2"

Step Treads:



14" X 39" X 6"

Veneer:



4" Random Length

3273 E.Sharon Rd, Sharonville, OH 45241 | 513-469-0335

www.TruStoneDistributors.com

Please Note: Stone products are of a natural origin and will have variations in color & marking. Sample pictures furnished represent only the general coloration & structure of a particular type of stone.

TruStone Premium Sandstone Pavers, Coping, Step Treads, and Caps

Your source for quality natural TruStone Sandstone pavers and products.



Sandstone

With a real TruStone Sandstone application, you have an unmatched natural beauty, no two pieces being the same. When used in a patio, walkway, or pool, the blend of natural colors and textures is breathtaking. Since TruStone Sandstone has been compressed in its natural state for millions of years, it is extremely durable and has a PSI strength stronger than most concrete products.

TruStone Premium Sandstone is precision cut and tumbled to eliminate the need for mortared joints and polymeric sand.

- **Eliminating joints will reduce cost and time on installation**
- **Tight fitting to enhance appearance**
- **Crated to the French pattern for easy installation**
- **12,000 – 15,000 psi compression strength**
- **Great for concrete overlay**

With TruStone Sandstone you will now have a piece of art at a reasonable cost that will last for generations.



Pewter Grey



Amber




Chestnut

Colors & Sizes

Our pavers are 1" thick great for patios and walkways and come in a variety of sizes including: **12" x 12", 12" x 24", 24" x 24", 24" x 36"**

Patterns

We stock large French (Versailles) patterns, which include: **12" x 12", 12" x 24", 24" x 24" and 24" x 36"**

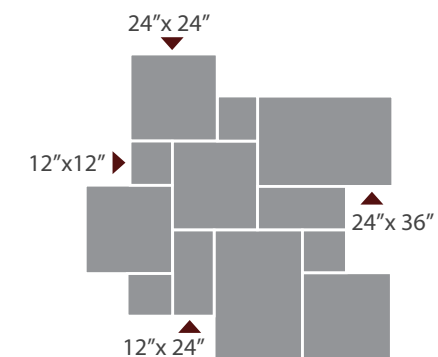

3273 E. Sharon Rd, Sharonville, OH 45241 | 513-469-0335

www.TruStoneDistributors.com

Please Note: Stone products are of a natural origin and will have variations in color & marking. Sample pictures furnished represent only the general coloration & structure of a particular type of stone.

TruStone Premium Porcelain Pavers

Your source for quality natural TruStone Porcelain pavers and products.



Porcelain

This beautiful material comes in many sizes and colors making it ideal for outdoor flooring in patios, courtyards, walkways, terraces, and swimming pool areas

Benefits Include:

- High resistance to breaking (high PSI)
- High non-slip performance
- Resistant to weathering and easy to clean

Easy to install in any setting

- Dry installation on sand, gravel or grass
- Traditional installation on screeds
- Raised installation on supports



3273 E.Sharon Rd, Sharonville, OH 45241 | 513-469-0335

www.TruStoneDistributors.com

Please Note: Stone products are of a natural origin and will have variations in color & marking. Sample pictures furnished represent only the general coloration & structure of a particular type of stone.

Travertine Pavers Technical Specifications

	Classic Ivory	Tuscany	Noche	Walnut	Silver
Hardness (MOHS)	3.5	3.5	4	4	3.5
Water volume AP by volume	2.5 gr/cm ³	2.5 gr/cm ³	2.3 gr/cm ³	2.5 gr/cm ³	2.4 gr/cm ³
Water volume AP by weight	2.75 gr/cm ³	2.70 gr/cm ³	2.89 gr/cm ³	2.72 gr/cm ³	2.64 gr/cm ³
Water absorption during atmosphere	1.6%	1.5%	1.8%	1.1%	1.2%
Absorption in the boiling water	3.0%	3.1%	2.8%	1.2%	1.4%
Porosity	2.4%	2.4%	2.5%	2.3%	2.9%
Pressure (Compressive Strength)	8001 psi	8022 psi	7980 psi	8107 psi	6827 psi
Pressure after frozen (Compressive Strength)	8203 psi	8270 psi	8100 psi	8277 psi	7154 psi
Pressure after impact (Impact Strength)	135.6 psi	133.6 psi	128.6 psi	156.46 psi	327.13 psi
Pressure during bending (Bending Strength)	1498 psi	1520 psi	1498 psi	1536 psi	2147 psi
Flexibility modulus (Modulus of elasticity)	9.75x10 ⁻⁴ kgF/cm ²	11.55x10 ⁻⁴ kgF/cm ²	7.55x10 ⁻⁴ kgF/cm ²	5.38x10 ⁻⁴ kgF/cm ²	5.90x10 ⁻⁴ kgF/cm ²
Repletion rate (Ratio of Fullness)	92%	93%	91%	91.9%	92.6%
Permeability rate (Degree of pores)	8.0%	8.5%	9.2%	8.1%	7.41%
Approx. wear strength (Avg. Tensile Strength)	1440 psi	1425 psi	1527 psi	1583.2 psi	1633 psi
Approximate shrinkage	37 kgF/cm ²	37 kgF/cm ²	39 kgF/cm ²	41 kgF/cm ²	39 kgF/cm ²
Thermal conductivity	1.26-1.33 k-W/(m.K)	1.26-1.33 k-W/(m.K)	1.26-1.33 k-W/(m.K)	1.26-1.33 k-W/(m.K)	1.26-1.33 k-W/(m.K)
Static Coefficient. Of Friction					
Dry Average	0.9 SCOF	0.9 SCOF	0.9 SCOF	0.9 SCOF	0.9 SCOF
Wet Average	0.7 SCOF	0.7 SCOF	0.7 SCOF	0.7 SCOF	0.7 SCOF



3273 E.Sharon Rd, Sharonville, OH 45241 | 513-469-0335

www.TruStoneDistributors.com



**Your one source for quality natural TruStone
Travertine, Marble, Sandstone & Porcelain pavers and products**



**TruStone Distributors has been providing Premium Quality
Natural Stone and Travertine Pavers & Supplies Since 2006**

3273 E.Sharon Rd, Sharonville, OH 45241 | 513-469-0335

www.TruStoneDistributors.com